

403 Rec'd PCT/PTO 23 DEC 1998 CT

FORM PTO-1390
(REV. 12-97)

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER

TP 1192-US

TRANSMITTAL LETTER TO THE UNITED STATES
DESIGNATED/ELECTED OFFICE (DO/EO/US)
CONCERNING A FILING UNDER 35 U.S.C. 371

U.S. APPLICATION NO. (If known, see 37 CFR 1.5)

09/214022

INTERNATIONAL APPLICATION NO.
PCT/JP97/01102INTERNATIONAL FILING DATE
19 June 1997PRIORITY DATE CLAIMED
1 July 1996

TITLE OF INVENTION

A CREASE LINED PACKAGING LAMINATE, A METHOD OF PROVIDING A PACKAGING LAMINATE . . .

APPLICANT(S) FOR DO/EO/US

Rolf Lasson

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).
4. ☒ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
 - a. ☐ is transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☒ has been transmitted by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☐ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
7. ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))
 - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ have been transmitted by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☒ have not been made and will not be made.
8. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).
10. ☐ A translation of the annexes of the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).

Items 11. to 16. below concern document(s) or information included:

11. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
12. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☒ A **FIRST** preliminary amendment.
☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
14. ☐ A substitute specification.
15. ☒ A change of power of attorney and/or address letter. (with Declaration)
16. ☒ Other items or information:

A copy of the published application;

A copy of the International Preliminary Examination Report;

A copy of Form PCT/IB/308;

Two Sheets of Formal Drawings.

U.S. APPLICATION NO. (if known, see 37 CFR 1.5)

INTERNATIONAL APPLICATION NO.

ATTORNEY'S DOCKET NUMBER

PCT/SE97/01102

TP 1192-45

17. ☒ The following fees are submitted:

BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)):

Search Report has been prepared by the EPO or JPO \$930.00

International preliminary examination fee paid to USPTO (37 CFR 1.482) \$720.00

No international preliminary examination fee paid to USPTO (37 CFR 1.482) but international search fee paid to USPTO (37 CFR 1.445(a)(2)) \$790.00

Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO \$1070.00

International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(2)-(4) \$98.00

ENTER APPROPRIATE BASIC FEE AMOUNT =

CALCULATIONS PTO USE ONLY

\$ 1070.00

Surcharge of \$130.00 for furnishing the oath or declaration later than ☐ 20 ☐ 30 months from the earliest claimed priority date (37 CFR 1.492(e)).

\$

CLAIMS

NUMBER FILED

NUMBER EXTRA

RATE

\$

Total claims

17 - 20 =

0

x \$22.00

\$

Independent claims

3 - 3 =

0

x \$82.00

\$

MULTIPLE DEPENDENT CLAIM(S) (if applicable)

+ \$270.00

\$

TOTAL OF ABOVE CALCULATIONS =

\$ 1070.00

Reduction of 1/2 for filing by small entity, if applicable. A Small Entity Statement must also be filed (Note 37 CFR 1.9, 1.27, 1.28).

+

\$

SUBTOTAL =

\$ 1070.00

Processing fee of \$130.00 for furnishing the English translation later than ☐ 20 ☐ 30 months from the earliest claimed priority date (37 CFR 1.492(f)).

\$

TOTAL NATIONAL FEE =

\$ 1070.00

Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property +

\$

TOTAL FEES ENCLOSED =

\$ 1070.00

Amount to be refunded:

\$

charged:

\$

a. ☐ A check in the amount of \$ _____ to cover the above fees is enclosed.b. ☒ Please charge my Deposit Account No. 200537 in the amount of \$ 1070.00 to cover the above fees. A duplicate copy of this sheet is enclosed.c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. 200537. A duplicate copy of this sheet is enclosed.

NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137 (a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:

Tetra Pak-US Intell. Prop. Dept.
909 Asbury Drive
Buffalo Grove, IL 60089
Telephone: (847-465-7000
Facsimile: (847) 465-7077

SIGNATURE

Michael A. Catania

NAME

36,474

REGISTRATION NUMBER

09/214022

300 Rec'd PCT/PTO 23 DEC 1998

**PATENT COOPERATION TREATY
UNITED STATES DESIGNATED/ELECTED OFFICE**

5 Applicants: Rolf Lasson) Docket No. TP-1192
)
)
Serial No.: Unassigned) Group Art Unit: Unassigned
)
Filed on: Herewith) Examiner: Unassigned
10 Intl. Applic. No.: PCT/SE97/01102)
)
Intl. Filing Date : 19 June 1997)
)
15 Title: A CREASE-LINED PACKAGING)
LAMINATE, A METHOD OF)
PROVIDING A PACKAGING LAMINATE)
WITH CREASE LINES, AND PACKAGING)
PRODUCED FROM THE LAMINATE)
20)
Assistant Commissioner for Patents
Box PCT
Washington, D.C. 20231
25 Attn.: DO/EO/US

PRELIMINARY AMENDMENT

Dear Sirs:

30 Transmitted for filing with the above-mentioned application under
35 U.S.C. 371 is a preliminary amendment of the claims.

35

40

5

AMENDMENTS

10

In the Claims:

Please cancel claims 1-13 without prejudice.

Please add the following new claims:

15

14. A packaging laminate comprising:

a first layer;

a second layer;

20

a plurality of linear fold regions defining a plurality crease lines of the packaging laminate and a plurality of non-fold regions, the plurality of linear fold regions being treated differently than non- fold regions.

15. The packaging laminate according to claim 14 wherein the linear fold

25

regions are treated with an adhesion counter-acting agent.

16. The packaging laminate according to claim 14 wherein the non-fold regions are treated with an adhesion agent.

30

17. The packaging laminate according to claim 14 wherein the first layer is paperboard and the second layer is selected from the group consisting of aluminum or a greaseproof paper.
- 5 18. The packaging laminate according to claim 14 wherein the plurality of linear fold regions correspond to a plurality of scored lines.
19. A method for producing a crease-lined packaging laminate, the method comprising:
- 10 providing a first layer of the packaging laminate, the first layer having a first plurality of linear fold regions and a first plurality of non-folding regions;
- providing a second layer of the packaging laminate, the second layer having a second plurality of linear fold regions and a first plurality of non-folding
- 15 regions; and
- treating at least one of the first and second plurality of linear fold regions differently than the first and second non-fold regions to thereby define a plurality of crease lines of the packaging laminate.
- 20 20. The method according to claim 19 wherein the linear fold regions are treated with an adhesion counter-acting agent between the first and second layers.

21. The method according to claim 19 wherein the non-linear fold regions are treated with an adhesion promoting agent between the first and second layers.

22. The method according to claim 21 wherein the adhesion promoting agent is an ultraviolet-curing agent, and the treating is effected by ultraviolet radiation after the first and second layers have been laid together.

23. The method according to claim 21 wherein the adhesion promoting agent is an electron beam curing agent, and the treating is effected by electron beam radiation after the first and second layers have been laid together.

24. The method according to claim 19 wherein the first and second layers are adhered to one another by the supply of heat and the treating is effected by providing an insufficient quantity of heat for adhesion to the linear fold regions.

25. The method according to claim 24 wherein one of the first and second layers absorbs heat and the plurality of linear fold regions of the layer absorbing heat absorbs an insufficient quantity of heat for adhesion.

26. The method according to claim 19 wherein the non-fold regions of at least one of the first and second layers is darkened relative to the linear fold regions, and the treating is effected by supplying infrared radiation.

27. A packaging container having non-scored crease lines, the packaging container comprising:

a first layer having a first plurality of linear fold regions defining a plurality crease lines of the packaging container, the first layer also having a first plurality of non-fold regions, the first plurality of linear fold regions being treated differently than the first plurality of non-fold regions; and

a second layer having a second plurality of linear fold regions defining a plurality crease lines of the packaging container, the second layer also having a second plurality of non-fold regions, the second plurality of linear fold regions being treated differently than the second plurality of non-fold regions.

28. The packaging container according to claim 27 wherein the non-fold regions of at least one of the first and second layers is darkened relative to the linear fold regions.

15

29. The packaging container according to claim 27 further comprising an adhesion counteracting agent applied to at least one of the plurality of linear fold regions.

30. The packaging container according to claim 27 further comprising an adhesion agent applied to at least one of the non-fold regions of the packaging container.

REMARKS

5 This application is filed under 35 U.S.C. 371. The original claims have been
amended to conform with accepted claim formats for U.S. patent applications. No
new matter has been included in new claims 14-30.

Applicant submits that the new claims of the present Application are patentable
in light of the prior art.

10

Respectfully submitted,

15

December 23, 1998 *Michael A. Catania*

Michael A. Catania

Registration No.:36,474

Attorney for Applicant

TETRA PAK-U.S. Intellectual Property Dept.

20

909 Asbury Drive

Buffalo Grove, Illinois 60089

Telephone (847) 465-7078

Facsimile: (847) 465-7077

A CREASE-LINED PACKAGING LAMINATE, A METHOD OF
PROVIDING A PACKAGING LAMINATE WITH CREASE LINES, AND
PACKAGING CONTAINERS PRODUCED FROM THE LAMINATE

5 TECHNICAL FIELD

The present invention relates to a crease-lined packaging laminate comprising at least two layers. The present invention also relates to a method of producing the crease-lined packaging laminate, and also to packaging containers produced from the crease-lined packaging laminate by fold forming.

BACKGROUND ART

Use has long been made in the packaging industry of packages of the single-use type for packing and transporting liquid foods. Such so-called single-use disposable packages are often manufactured from a flexible material which, by fold forming and sealing, is converted into filled, sealed packaging containers of the desired shape. A very large group of these disposable packages is produced from a laminated packaging material comprising a core layer of paper or paperboard and outer, liquid-tight coatings of plastic on both sides of the core layer. The packaging laminate may also include additional layers of plastic and/or metal in order to impart to the packaging containers superior barrier properties against, for example, gases and light.

While the packaging material is in the unfolded, planar state, it is often provided with lines of weakness, so-called crease lines, for facilitating folding with the purpose of facilitating the conversion of the packaging material into packaging containers of the desired configuration.

Conventionally, such crease lines are realised by placing the packaging material intended for creasing between moving male and female parts of a creasing tool which, by pressing, deforms and impresses the desired weakening pattern in the packaging material. The deformation takes place in that the packaging material is, along the intended fold lines, pressed into grooves in the female part of the tool by means of linear projections or ridges on the surface of the male tool. A packaging material with crease lines produced in this manner displays a positive and a negative side, i.e. the creasing tool gives rise to an elevated linear (ridge-like) deformation of the

one, positive side of the packaging material, and a corresponding linear depression on the other, negative side of the packaging material.

5 A pattern of such crease lines may be obtained on processing of planar material sheets by means of press plates or by so-called rotation creasing, i.e. creasing of a continuous web by means of two cooperating rotary rollers with complementary channels or grooves and ridges or beads respectively.

10 The conventional method of realising crease lines makes for a simple folding process with distinct folding lines, but changes in the process entail high costs and extensive work, since each specific crease line pattern and each specific packaging material, with specific thickness and quality, requires its unique creasing tool with adapted widths and depths in the grooves and ridges.

15 A further drawback inherent in the conventionally crease-lined packaging material is that the folded side edges of the packaging container tend to have a rounded, blunt appearance. On fold forming along the crease line, the raised linear deformation of the packaging material is compressed on the positive side of the packaging material, on the inside of the packaging container, forming ridges or accumulations of packaging material. Since the
20 relatively large accumulation of compressed packaging material is located centrally in the fold, and because of the relative resilience of the fibres gathered in the material accumulation, tensions and forces arise in the fold edge because of the material's propensity to "spring back" to its original planar form. As a result of these resilient return forces, the fold edges of the
25 packaging container will become readily gently rounded with a tendency to be flattened on external loading, for example from the grip of a hand, which gives the package an impression of poor grip rigidity.

A known method of realising better defined folds in a packaging container is described in Swedish Patent Application carrying publication
30 number 467302. By removing the above mentioned raised linear deformation on the positive side of the packaging material, by mechanical processing such as milling, subsequent folding of the packaging material is facilitated at the same time as the material is weakened along the crease line and the return resilience forces in the fold region are reduced. However, this method
35 suffers from the drawbacks that the surface of the packaging material on the inside of the packaging container is locally destroyed in the crease line

region, and that the strength of the fold is reduced as a result of the removal of material. Moreover, dust and/or waste material are created which need to be taken care of.

5 OBJECTS OF THE INVENTION

One object of the present invention is therefore to realise a crease-lined packaging material of the type described by way of introduction, without consequential problems of the type intimately related to the prior art techniques and methods.

10 Another object of the present invention is to realise a crease-lined packaging material of the type described by way of introduction which makes for sharper, better defined folds of the packaging material and thus better formed edge lines and corners in a packaging container.

Yet a further object of the present invention is to provide a method for
15 realising crease lines in a packaging material of the type described by way of introduction, obviating complex, conventional creasing processes using relatively expensive creasing tools, and to make for simpler, more rational and more economical changes of crease line patterns on switching between different package sizes and packaging material qualities.

20 Still a further object of the present invention is to realise a better formed packaging container possessing improved configurational stability and gripping stability on the action of external forces.

SOLUTION

25 These and other objects are attained by means of a laminated packaging material possessing the characterizing features as set forth in appended Claim 1. Preferred embodiments of the packaging material according to the present invention are apparent from appended subclaims 2 to 6.

30 The method according to the present invention has the characterizing features as set forth in independent Claims 7, 8 and 10, respectively. Variations and modifications of the method according to the invention have further been given the characterizing features as set forth in appended subclaims 9 and 11 to 13, respectively.

35 Furthermore, the present invention provides a grip stable packaging container with well-defined side edges which is produced by fold forming of

a packaging laminate according to the present invention.

By selectively reducing or eliminating the bonding adhesive strength between the layers in a packaging laminate which comprises at least two such layers, along the linear regions along which the packaging laminate is to be folded, relatively complex, conventional creasing processes using expensive creasing tools can be obviated, at the same time as the fold edges of the packaging container will be more distinct and the packaging container will thereby be given attractive appearance with good handling stability and durability.

BRIEF DESCRIPTION OF THE ACCOMPANYING DRAWINGS

The above-outlined aspects of the present invention will now be described in greater detail hereinbelow, with particular reference to the accompanying Drawings, in which:

Figs. 1a and 1b schematically illustrate a cross section of a packaging container of a conventionally laminated packaging material and a laminated packaging material according to the present invention, respectively; and

Fig. 2 schematically illustrates one example of a crease-lined packaging material according to one embodiment of the present invention.

While the present invention will be described in greater detail with reference to specific embodiments shown on the Drawings, it will be obvious to a person skilled in the art that different modifications and variations may be made without departing from the inventive concept as this is defined in the appended Claims.

DESCRIPTION OF PREFERRED EMBODIMENT

Fig. 1a thus shows a cross section of a packaging container of a conventionally creased packaging laminate 10. Examples of such conventional packaging containers are Tetra Brik® or Tetra Rex®. The conventional packaging laminate 10 comprises a core layer or carrier layer 11 of paper or paperboard and a layer 12 disposed on the inside of the core layer.

The layer 12 is normally a gas or light barrier layer of, for example, an aluminium foil (Alifoil) or a metalised plastic film, such as aluminised, oriented polypropylene or aluminised, oriented polyester. The concept "metalised" implies that a thin layer of metal has been deposited on a surface

by means of known deposition techniques such as, for example, the CVPD technique (Chemical Vapour Plasma Deposition), and encompasses metal oxides such as, for example, silicon oxide (SiO_x , where x is between 1.5 and 2.2). The layer 12 may also consist of a so-called greaseproof layer of the glassine type or greaseproof paper.

In conventional creasing, the total flexural resistance of the packaging laminate is reduced along the crease zones by linear deformation of the packaging laminate. The packaging material 10 thus has raised linear deformations on the inside of the packaging material, which, during the fold forming operation, are compressed on the inside of the corners of the fold edges. On fold forming, the inside of the packaging laminate is pressed with these raised linear deformations together in the corners of the folded side edges on the inside of the packaging container. The folded side edge corners will be less distinct, since the compressed packaging material on the inside of the fold corners tends to "spring back" to the uncompressed state.

Fig. 1b shows the same type of packaging container of a packaging laminate 20 comprising the same material layers but with crease lines according to the present invention. The packaging material 20 has been provided with fold indications by reducing, or preferably eliminating the adhesive bonding strength between the core layer 11 and the layer 12 laminated on the inside of the core layer along the fold indications.

In a laminate of two layers in which both layers adhere to one another in blanket fashion, the rigidity of the core layer 11 affects the folding process in the core layer 12, and vice versa. During the folding process, the one material layer is influenced by resistive forces and tension which arise because of the fact that the material rigidity of the second layer strives to accompany the first layer in the folding operation. When adhesion is reduced or eliminated between the two layers in the fold regions, the two layers need not, on the other hand, accompany one another in the folding, and therefore do not affect each other as much during the folding process.

Since the layers 11 and 12 can be deformed more independently of one another along the linear adhesion-reducing fold indications, they have no influence on each other's flexural rigidity during the folding process. The layer 12 thus makes no contribution in the total rigidity of the laminate by being laminated to the layer 11, and vice versa, whereby the total flexural resistance along the linear fold regions will be less than in the rest of the

packaging material.

Since the total flexural resistance is lower in the linear fold indication regions, within which the adhesive bonding strength is reduced or eliminated, the packaging material becomes more easily folded, i.e. deformable along these regions than in other regions of the packaging material. In regions where the layers are adhesion-reduced or adhesion-free, the flexural resistance thus consists substantially only of the flexural resistance of the more rigid of the layers. The total flexural resistance in the above-mentioned linear fold indication regions is estimated in the packaging laminate 20 to be approximately as great as the total flexural resistance in a conventional crease line in the same packaging laminate. The linear regions with reduced or eliminated adhesion thus constitute distinct fold indications in the packaging material without the packaging material having been deformed in any way beforehand.

Such fold indications will be more distinct and easily folded if both layers are relatively rigid, i.e. contribute to the total rigidity and flexural resistance of the packaging laminate, as is, for instance, the case when a core layer and a layer comprising an aluminium foil are laminated.

Another packaging laminate according to the invention may be crease-processed both by conventional mechanical deforming and by adhesion-reduction or adhesion-elimination between the layers in the fold regions. Such a "double creased" packaging laminate achieves better defined folds and corners in the fold-formed packaging container and lower flexural resistance as compared with exclusively conventional mechanical deformation.

The linear weakening regions according to the present invention should be sufficiently wide to give the requisite weakening in the packaging material, i.e. to facilitate folding, at the same time as they must be sufficiently narrow to give a sharp, straight and well-defined side edge on fold forming. The width of the crease line thus depends on the material properties and thicknesses of the layers included in the packaging laminate, and hence varies for different packaging laminates. In a conventional packaging laminate with a core layer of paper or paperboard and an aluminium foil, the width of the crease line is preferably between approximately 1 and 3 mm.

The reduction or elimination of the adhesive bonding strength between the two layers 11 and 12 as disclosed above may be realised in

different ways. According to one method, an adhesion-counteracting agent is applied on one or both of the layers within the linear fold regions. The term adhesion-counteracting agent is taken to signify an agent which possesses adhesion-counteracting properties vis-à-vis one or both of the layers between which the adhesion is to be reduced. Such agents are known to persons skilled in the art.

According to another method, an adhesion-promoting agent is instead applied to one or both of the layers in the regions outside the above-mentioned linear regions, but not within them. Such an adhesion-promoting agent thus has good adhesive properties in respect of both of the layers which are to be laminated. Adhesion-promoting agents and glues of all types are conceivable, and also compositions which harden or cure with the aid of heat (IR-), UV- or EB (Electron Beam) radiation. Adhesion is achieved in that the adhesion-promoting agent is applied to one of both of the layers which are to be laminated to one another, that both of the layers are laid together and are thereafter cured with the aid of heat, UV- or EB-radiation respectively. For such radiation curing to function, the materials involved must be adapted to each respective type of radiation and, in the latter two cases, the layer placed most proximal the source of radiation must be permeable for the radiation. Thus, a UV curing composition can cure after the layers intended for lamination have been laid together only if the layer disposed most proximal the radiation is permeable for UV light, such as, for example, a transparent plastic layer.

One special method of laminating two layers to one another is based on the concept of bringing the two layers to surface fusion with one another by the supply of heat within the regions outside the crease lines. This presupposes that the layers are thermosealable or are provided with thermosealable outer layers. One such thermosealable layer is, for example, polyethylene. Higher adhesion bonding strength between the two layers in the regions outside the linear fold regions is achieved by selectively treating the surface of one or both of the layers which are to be laminated to one another such that the regions outside the above-mentioned linear fold regions absorb sufficient heat for surface fusion, and that the surfaces within the linear fold regions absorb an insufficient quantity of heat for surface fusion. For example, the surfaces in the regions outside the linear fold regions (Fig. 2; (15)) are darkened or blackened in order to absorb more heat

on IR-radiation than the relatively lighter surfaces in the fold regions (16).

The selective treatment of the layers may take place with the aid of known printing techniques. Both the adhesion-counteracting and the adhesion-promoting agents, like the dark or black colour, may be applied using printing rollers. Fig. 2 shows an example of a conventional crease line pattern which has been darkened or blackened on one layer in the regions outside the linear fold regions (15).

Under the action of external forces, such as, for example, from a gripping hand, on a folded side edge according to the invention, the external forces are divided up into force components in the plane which is defined by the side walls of the packaging container. Compared with conventional packaging containers which have a less well-defined configuration because of less distinct side edges, and in which such force components tend to deviate from the plane of the side walls, the outward bulging of the side walls of the packaging container which normally occurs under the action of such external forces is reduced and the folded side edge is better capable of withstanding the tendency to weaken and give way. A packaging container produced by fold forming of a packaging material creased by the method according to the present invention is thus more stable to grasp hold of and handle.

As will be have been apparent from the foregoing description, the present invention thus makes it possible to avoid relatively complicated, conventional folding processes using expensive folding tools, and makes for simpler, more rational and more economical changing of crease line patterns on switching between different package sizes and packaging material qualities, at the same time as the folded side edges in packaging containers produced from the packaging laminate will be more distinct and, as a result, the packaging container according to the present invention is given an attractive appearance with good handling stability and handling durability.

WHAT IS CLAIMED IS:

1. A crease-lined packaging laminate (20) comprising at least two layers (11, 12), characterized in that the adhesive bonding strength between said at least two layers is reduced or eliminated along the crease lines of the packaging laminate.
5
2. The packaging laminate as claimed in Claim 1, characterized in that one of said layers (11, 12) is locally treated along the crease lines in order to counteract adhesion to the adjacent layer.
10
3. The packaging laminate as claimed in Claim 2, characterized in that an adhesion-counteracting agent is applied between said layers (11, 12) along the crease lines.
15
4. The packaging laminate as claimed in Claim 3, characterized in that one of said layers consists of paper or paperboard (11).
20
5. The packaging laminate as claimed in any of the preceding Claims, characterized in that the second layer (12) comprises an aluminium foil.
25
6. The packaging laminate as claimed in any of the preceding Claims, characterized in that the second layer (12) comprises a paper of greaseproof type.
30
7. A method of producing a crease-lined packaging laminate (20) as claimed in any of Claims 1 to 6, characterized in that an adhesion-counteracting agent is applied in the regions of the crease lines between said at least two layers (11, 12).
35
8. A method of producing a crease-lined packaging laminate (20) as claimed in Claim 1 or 2, characterized in that an adhesion-promoting agent is applied in the regions outside the crease lines between said at least two layers (11, 12).
40
9. The method as claimed in Claim 8, characterized in that the adhesion-

promoting agent is a UV-curing or EB-curing agent; and that curing is effected by UV- or EB-radiation, respectively, after said at least two layers have been laid together.

- 5 10. A method of producing a crease-lined packaging laminate (20) as claimed in any of Claims 1 to 6, characterized in that said at least two layers (11, 12) are caused to adhere to one another by the supply of heat; and that an insufficient quantity of heat for adhesion is supplied to the regions of the crease lines.

10

11. The method as claimed in Claim 10, characterized in that the surface of at least one of said layers absorbs heat; and that the same layer in the regions of the crease lines absorbs an insufficient quantity of heat for adhesion.

15

12. The method as claimed in Claim 11, characterized in that heat is supplied by means of IR-radiation of blackened or darkened surfaces (15) on at least one of said layers; and that the layer in the region of the crease lines (16) is white or relatively lighter in colour.

20

13. Packaging containers produced by fold forming of a crease-lined packaging laminate as claimed in any of Claims 1 to 6.

Fig. 1a

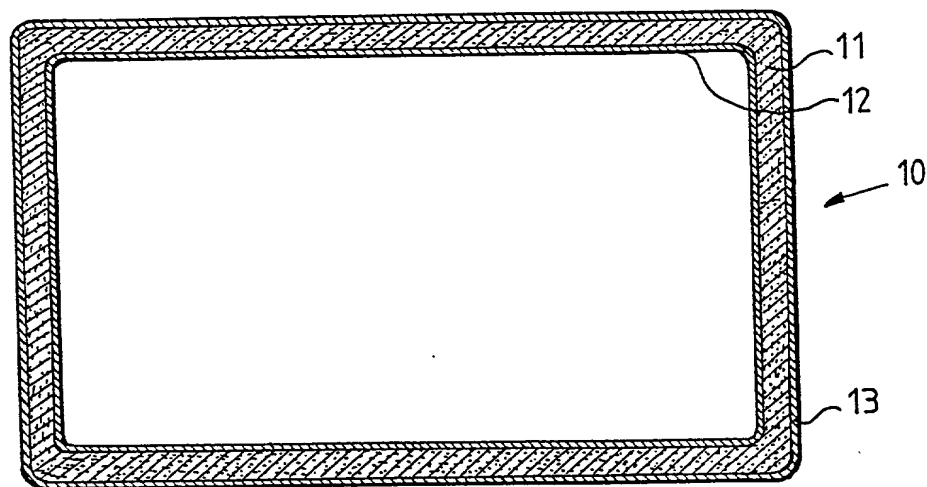


Fig. 1b


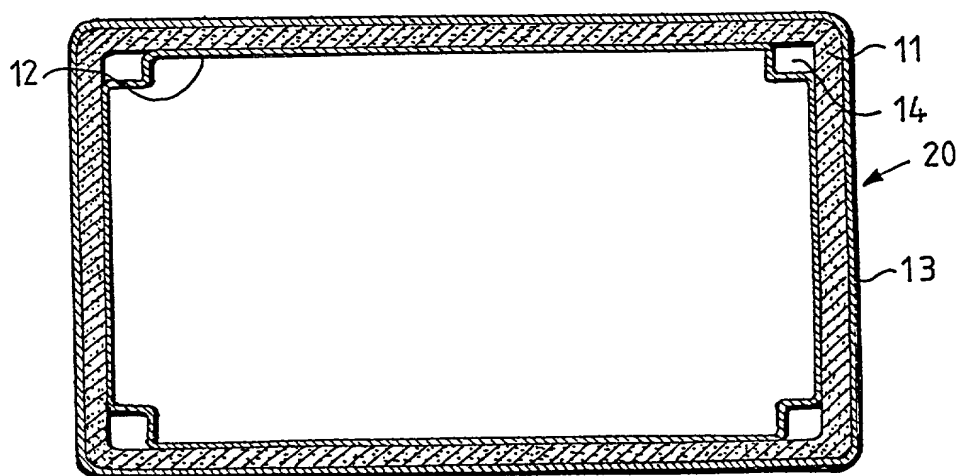


Fig. 2

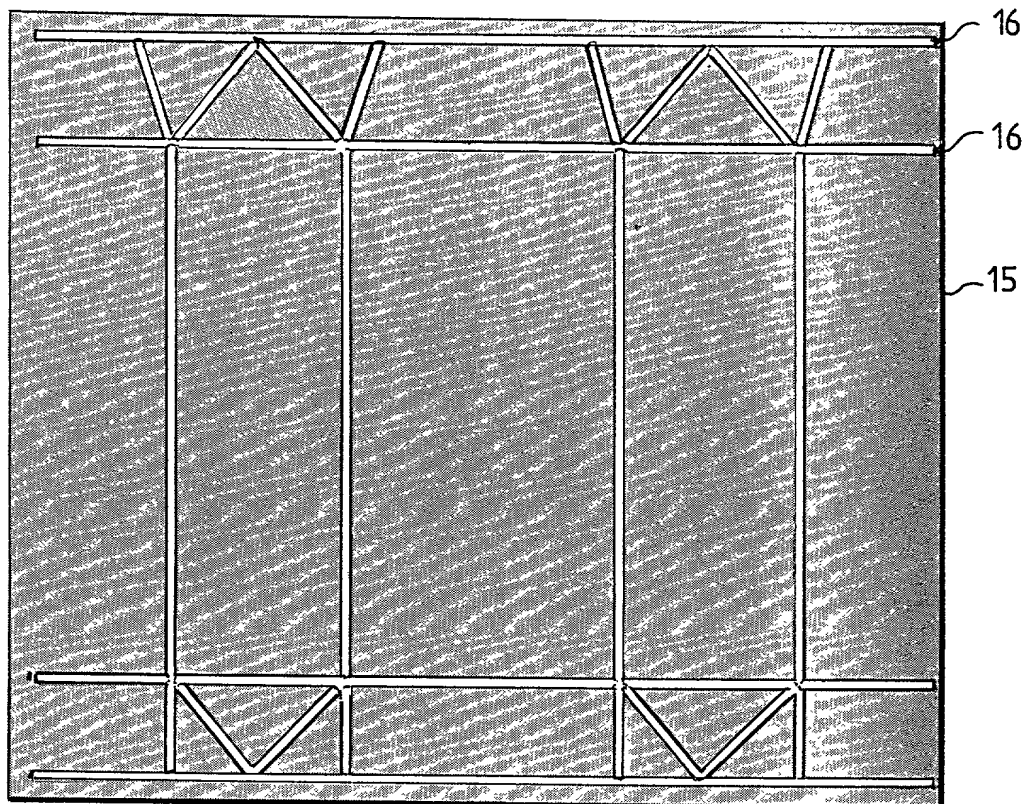

Please type a plus sign (+) inside this box → ☐PTO/SB/01 (8-96)
Approved for use through 9/30/98. OMB 0651-0032
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1996, no persons are required to respond to a collection of information unless it contains a valid OMB control number.**DECLARATION FOR
UTILITY OR DESIGN
PATENT APPLICATION**☒ Declaration OR
Submitted
with Initial Filing ☐ Declaration
Submitted after
Initial Filing

Attorney Docket Number	TP 1192-US
First Named Inventor	Rolf Lasson
COMPLETE IF KNOWN	
Application Number	
Filing Date	
Group Art Unit	
Examiner Name	

As a below named inventor, I hereby declare that:

My residence, post office address, and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

**A CREASE_LINED PACKAGING LAMINATE, A METHOD OF PROVIDING A
PACKAGING LAMINATE WITH CREASE LINES, AND PACKAGING CONTAINERS
PRODUCED FROM THE LAMINATE**

the specification of which

(Title of the invention)

☒ is attached hereto
OR☐ was filed on (MM/DD/YYYY)

as United States Application Number or PCT International

Application Number

and was amended on (MM/DD/YYYY)

(if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment specifically referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37 Code of Federal Regulations, §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code §119 (a)-(d) or §365(b) of any foreign application(s) for patent or inventor's certificate, or §385 (a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or of any PCT international application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application Number(s)	Country	Foreign Filing Date (MM/DD/YYYY)	Priority Not Claimed	Certified Copy Attached?	
				YES	NO
9602607-5	Sweden	07/01/96	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

☐ Additional foreign application numbers are listed on a supplemental priority sheet attached hereto:

I hereby claim the benefit under Title 35, United States Code §119(e) of any United States provisional application(s) listed below.

Application Number(s)	Filing Date (MM/DD/YYYY)	<input type="checkbox"/> Additional provisional application numbers are listed on a supplemental priority sheet attached hereto.

Please type a plus sign (+) inside this box →



PTO/SB/01 (8-96)

Approved for use through 9/30/98. CMB 0651-0032

Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION

I hereby claim the benefit under Title 35, United States Code §120 of any United States application(s), or §365(c) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of Title 35, United States Code §112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations §1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

U.S. Parent Application Number	PCT Parent Number	Parent Filing Date (MM/DD/YYYY)	Parent Patent Number (if applicable)

☐ Additional U.S. or PCT international application numbers are listed on a supplemental priority sheet attached hereto.

As a named inventor, I hereby appoint the following registered practitioner(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

Name	Registration Number	Name	Registration Number
Michael A. Catania	36,474		

☐ Additional registered practitioner(s) named on a supplemental sheet attached hereto.

Direct all correspondence to:

Name	Michael A. Catania		
Address	Tetra Pak-US Intellectual Property Department		
Address	909 Asbury Drive		
City	Buffalo Grove	State	IL
		ZIP	60089
Country	United States	Telephone	(847) 465-7078
		Fax	(847) 465-7077

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Name of Sole or First Inventor:

☐ A petition has been filed for this unsigned inventor

Given Name	Rolf	Middle Initial		Family Name	Lasson	Suffix e.g. Jr.	
Inventor's Signature					Date	1998-12-01	
Residence: City	Lund	State	SE	Country	Sweden	Citizenship	Swedish
Post Office Address	Rudeboksvägen 307, S-226 55 Lund, Sweden						
Post Office Address							
City		State		Zip		Country	

☐ Additional inventors are being named on supplemental sheet(s) attached hereto

RECEIVED
 11/30/98
 10:00 AM
 TETRA PAK US INTEL PROP